

ETP-SMB NEMA 4X Surface Mount Accessory with Door

Description

The **ETP-SMB** Surface Mount Accessory with Door is designed to surface mount any Talkaphone flush mount call station indoors or outdoors and to protect it from the harshest environments. Additionally, the unit offers extra room to accommodate a handset call station from Talkaphone. The unit is constructed of durable marine grade stainless steel with a latching door.

The **ETP-SMB** is a NEMA 4X rated enclosure and is often used in such harsh environments as industrial campuses, transit facilities, bridges, and tunnels.

Features

- Durable housing is suitable for mounting Talkaphone handset-style call stations outdoors onto a surface
- Includes an easy-to-use latching door
- Vandal-resistant stainless steel construction
- Fully gasketed door and latch
- A variety of signage, graphics and color choices are available



Specifications


Dimensions (W x D x H):	11.03 x 6.76 x 15.91 in. (280 x 172 x 404 mm)
Weight:	12.5 lbs. (5.7 kg)
Construction:	18GA (.05 in.) brushed marine grade (316) stainless steel
Colors:	Brushed stainless steel is standard. Available painted in custom colors.
Signage:	Available with 0.75 in. high reflective lettering with wide-angle visibility
Mounting:	Mounts to a surface or wall. Straps to a pole with optional ETP-PMKT Pole Mounting Kit.
Ingress Protection:	NEMA 4X compliant (conduit hole must be sealed with appropriately rated equipment; provided by others) IP66 rating
Warranty:	2-year warranty

Options & Accessories

Surface Finish:	Model ETP-SMB-EP offers an electropolished finish.
Pole Mounting Kit:	Order ETP-PMKT Pole Mounting Kit for strapping ETP-SMB to a pole.
Strapping Tool:	Order ETP-PMKT-TOOL Strapping Tool for use with ETP-PMKT Pole Mounting Kit.
Magnetic Door Switch:	Model ETP-SMB-MS includes a magnetic two-pole switch that activates when the door is opened.

ETP-SMB
NEMA 4X Surface Mount Accessory with Door

Dimensional Diagram

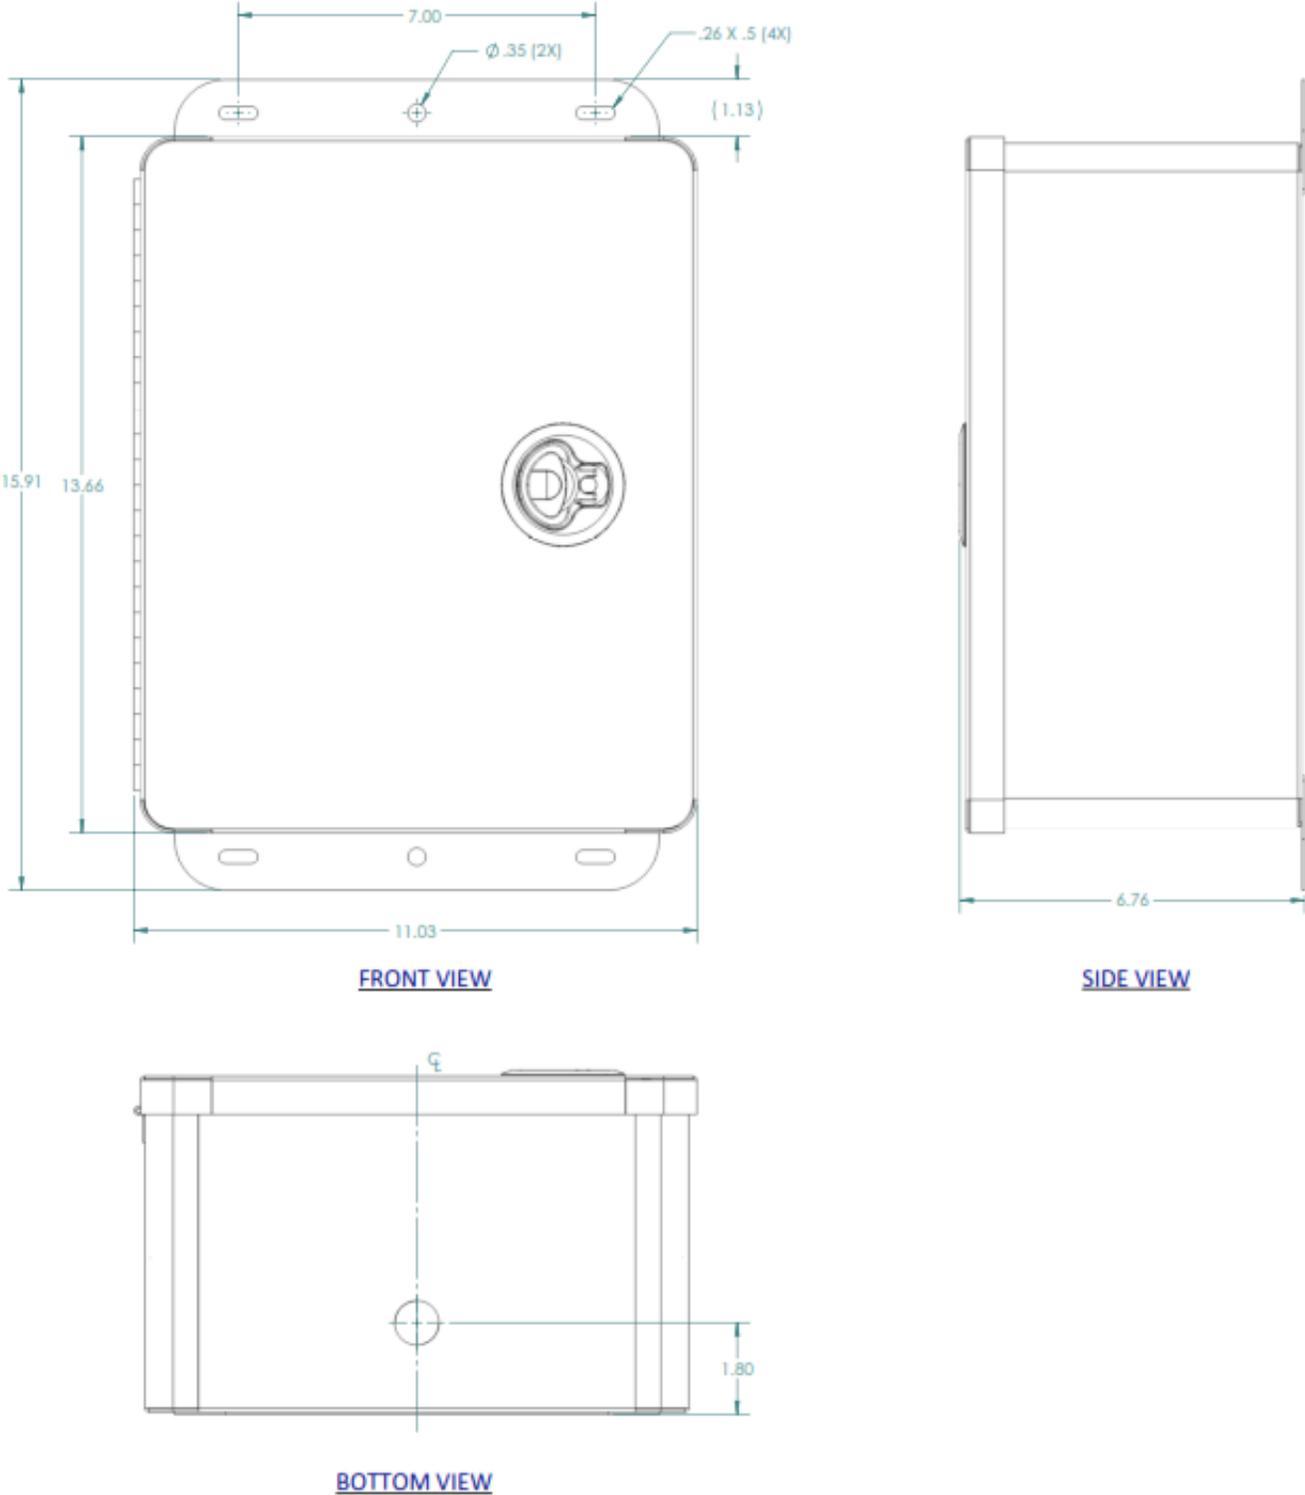

All dimensions are in inches and are provided for reference only.