

Description

The **ETP-103V** is an indoor, hands-free analog call station designed for mounting behind an elevator car operating panel (C.O.P.) or other location where a faceplate is not needed and an external pushbutton is utilized.

Features

- Built-in hands-free microphone and speaker—needs to align with microphone/speaker cutouts on elevator C.O.P.
- Built-in flying leads connect to elevator C.O.P. pushbutton (not included)
- Built-in flying leads connect to LED indicator (one (1) included) inserted into elevator C.O.P. pushbutton
- Uses regular analog phone lines or PBX extension
- Phone line powered: no power supply or battery backup needed
- Unit auto-dials up to two (2) numbers. If first number doesn't answer or is busy, dials second number.
- Auto-answer allows remote monitoring through an inbound call
- Ability to playback a prerecorded message with location information at the beginning of a call



Specifications


Dimensions:	4.5 x 7.5 x 2.5 in. (114 x 191 x 64 mm)
Weight:	3.0 lbs. (1.4 kg)
Mounting:	Mounts behind elevator C.O.P.
Communication:	Half duplex two-way hands-free communication
Power:	Phone line powered (requires 20mA, 24V off-hook and 48V on-hook)
Connection:	Built-in cable harness with RJ11 connector for quick installation
Recommended Wiring:	One (1) shielded twisted pair (STP)
Circuit Protection:	Varistor lightning suppressed and full wave polarity guarded
Programming:	Non-volatile EEPROM programming can be done from a remote telephone. Remote diagnostics of the phone are provided via ETP-TAL. No battery backup is needed.
"On Time":	Programmable from 1 to 4,270 minutes in 1-minute increments
Digit Capacity:	Up to 18-digits, including pauses, for each of two (2) phone numbers
Dialing Speed:	Approximately ten (10) tones per second
Approvals:	FCC 47 CFR Part 68 certified
Warranty:	2-year limited warranty

Options & Accessories

8-Line Consolidator:	Model EC-8 allows connection of up to eight (8) analog call stations on one (1) phone line while retaining ability to call into each analog call station individually. Also can be used to create a closed system without need for any phone lines.
Monitoring/Diagnostic Software Package:	Talk-A-Lert®, model ETP-TAL , automatically polls each analog call station, reports incoming calls and keeps permanent records of all events

ETP-103V O.E.M. Analog Call Station

Dimensional Diagram

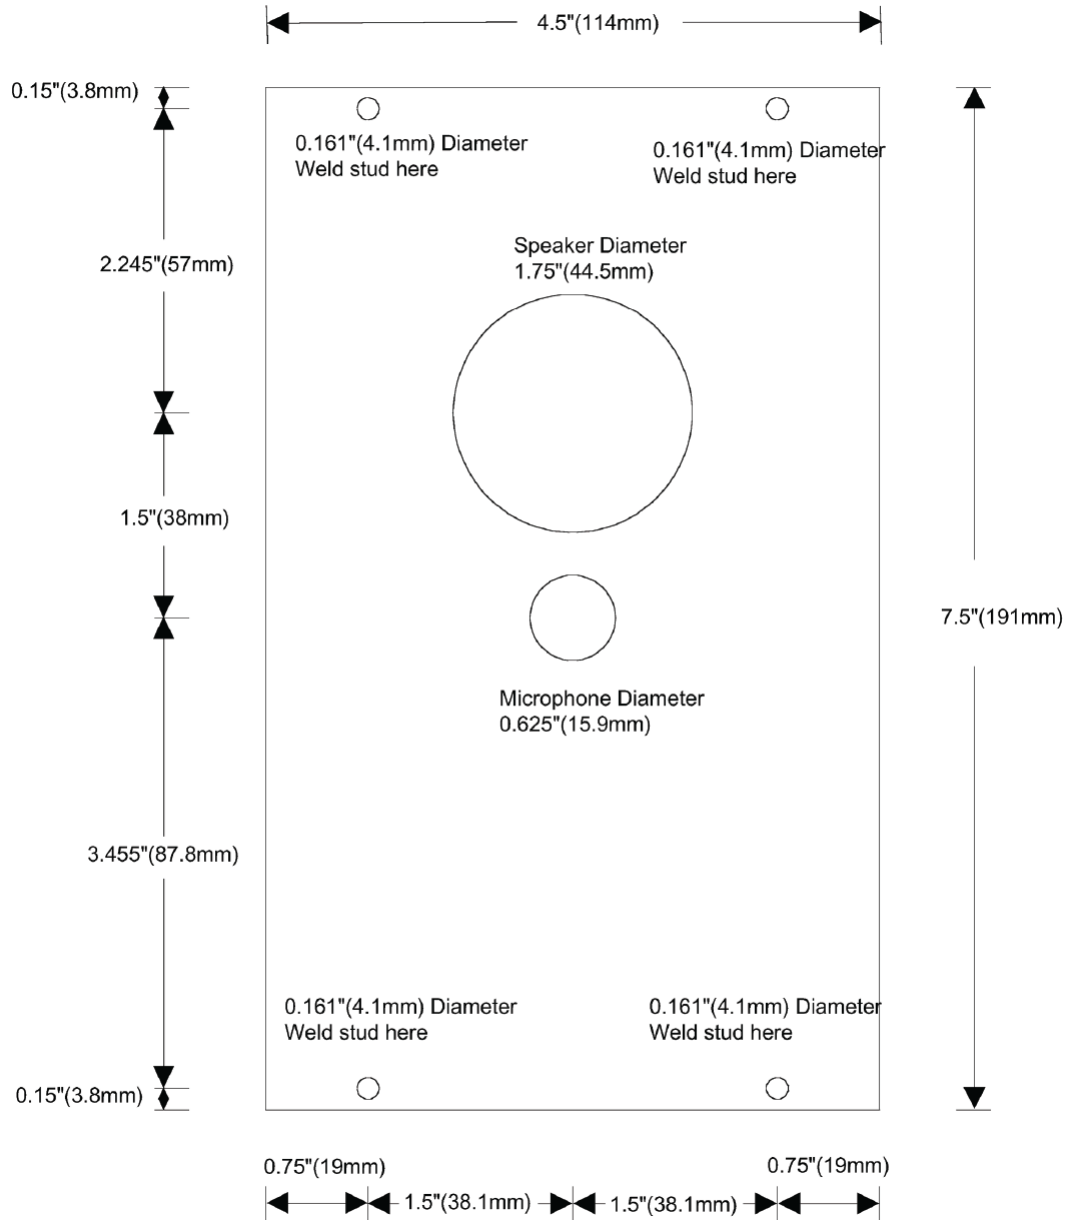

All dimensions are in inches and are provided for reference only.